

DIGITAL ELECTRONIC 2-D WHEEL-BALANCER WITH ADJUSTABLE LED DISPLAY, LASER LINE AND LED LIGHT



S 825


S 825



STANDARD FEATURES S 820

Max. wheel weight	75 kg
Max. wheel diameter	1100 mm
Rim diameter	10" - 30" / 255-765 mm
Rim width	1,5" - 20" / 40-510 mm
Power supply	230V 1ph (50/60) Hz
Cycle time	5,3 s (5 3/4"x14") 15 kg
Balancing speed	< 150 rpm
Balancing precision	+ 1g
Net weight with guard	92 kg

DIMENSIONS

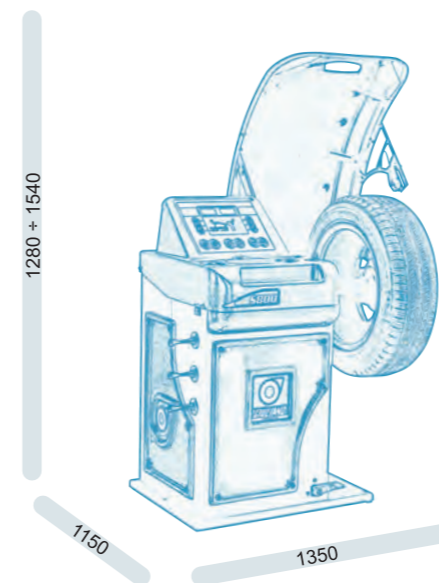

STANDARD ACCESSORIES



FUNCTIONS

- Automatic measuring of wheel diameter and distance
- Automatic START and STOP
- Pedal brake
- Static and dynamic balancing
- Huge combination of ALU programs
- NWN System
- Special ALU-S program
- FES function
- OPTIMATCH function
- Self-diagnosis
- Self-calibration
- OPF function
- Complete with cones and quick clamping ring nut
- Complete with Wheel guard
- Laser line indicator for exact positioning of adhesive weights
- LED light on working area
- Automatic measuring of wheel width by SONAR (LA) available as optional (factory mounted only)



09/2018



Giuliano Industrial S.p.A.: Via Guerrieri, 6 - 42015 CORREGGIO (RE) ITALY
 Tel. +39 0522 731111 - Telefax +39 0522 633109 - E-mail: info@giuliano-automotive.com
 Internet: www.giuliano-automotive.com

Since 1976

