Completely hydraulic machine, fits in most popular commercial VANs.

For mobile service of truck, bus and road transportation vehicle tyres. Suitable for both tube and tubeless tyres.

S562

Watch the video

S562

www.giuliano-automotive.com

TRUCK TYRE CHANGER 13" - 27" FOR MOBILE TYRE SERVICE

- Hydraulic movement of **clamping chuck** holding arm (up-down).
- Hydraulic travel movement of **operating arm carriage** (left-right).
- Operating arm **manual tilting** and **travelling** on carriage.
- Innovative double tool (nylon roller + finger) allows to handle tyres either **with** or **without** a **bead guide lever**.



Multi-stage clamping jaws with nylon protectors for alloy wheels.

- Rim center hole clamping range **ø 80 - 700 mm**.
- Clamping chuck **minimum height** from ground **330 mm** (according to van's floor height).
- Emergency safety button on control console and generator, for stopping all functions.
- Electro-hydraulic motor for clamping chuck rotation.
- Wheel clamping by fully hydraulic operated jaws.
- Clamping chuck holding arm **tilts outside** the van-door. **Folds back** inside the van after use.
- Machine installation from the **side** or **back door** of the VAN.

Available in version without generator and compressor (optional).
See generator and compressor specs here below:

GENERATOR
Power - 10,6 kW / Supply - Diesel / Voltage - 230 V 1ph/400 V 3ph / Cooling - H_2O
COMPRESSOR
Capacity - 100 lt / Air flow - 650 lt/min / Voltage - 230V 1ph/400V 3ph

Also equipped with 2 air feeding plugs and hoses, complete with coilers mt. 10, plus one extra electric plug for connecting 220V-1ph outlet.

MIN. SIZE OF VAN'S DOOR REQUIRED FOR COMPLETE ASSEMBLY'S INSTALLATION.

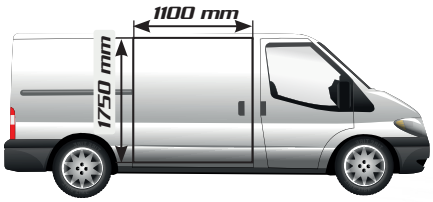

Complete your mobile tyre service set with S861 Balancer!!

STANDARD FEATURES

Rim clamping range	13" - 27"
Max. tyre diameter	1600 mm (63")
Max. tyre width	870 mm (34")
Bead breaker cylinder force	18760 N
Rim center hole minimum clamping diameter	80 mm
Operating pressure	130 Bar (1885 Psi)
Power supply	400V - 3ph *
Hydraulic pump motor power	2,2 kW 400V 3ph
Clamping chuck motor	Hydraulic
Net weight	543 kg
Generator + Compressor net weight	416 kg
Max. tyre assembly weight	1000 kg
Max. overall dimensions	1000x1030x1580 mm
Max. overall dimensions with generator/compressor	1610x1030x1580 mm

** Other voltages and frequencies available upon request*

Low Volume

400V-3ph-1V

Available in:
- Blue Trim
- BlackTrim
- Red Trim

STANDARD ACCESSORIES

- Kit of clamp protections in aluminium with plastic inserts for alloy rims
- G-Clamp for alu-rims